

DULUX L 80 W/840 2G11

OSRAM DULUX L LUMILUX | CFLni, 1 tube, with 4-pin base for ECG/CCG operation



- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

Product benefits

- Very economical
- Outstanding luminous flux
- Outstanding luminous efficiency
- Long service life
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG
- Less than half as long as tubular fluorescent lamps
- Improved maintenance

Product features

- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in 2G11 base
- Dimmable (1...100 % with QUICKTRONIC QT_i DALI/DIM)
- Color rendering index R_a : 80...89
- Average life: 20,000 h (with QUICKTRONIC)
- Operates on battery, solar and AC power with suitable Electronic Control Gear
- Also available in blue



Technical data

Electrical data


Nominal wattage	80 W
Rated lamp efficacy (standard condition)	81 lm/W
Rated wattage	80 W

Light technical data


Color rendering index Ra	80...89
Rated luminous flux	6500 lm
Luminous flux at 25 °C	6500 lm
Light color	840
Color temperature	4000 K
Nominal luminous flux	6500 lm
Rated LLMF at 2,000 h	0.93
Rated LLMF at 4,000 h	0.90
Rated LLMF at 6,000 h	0.88
Rated LLMF at 8,000 h	0.86
Rated LLMF at 12,000 h	0.84
Rated LLMF at 16,000 h	0.81
Rated LLMF at 20,000 h	0.80
Luminance	3.7 cd/cm ²

Dimensions & weight

Tube diameter	17.5 mm
Length	565.0 mm
Length acc. to IEC standard	565 mm

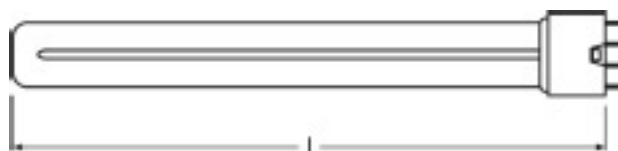

Product line drawing with letters

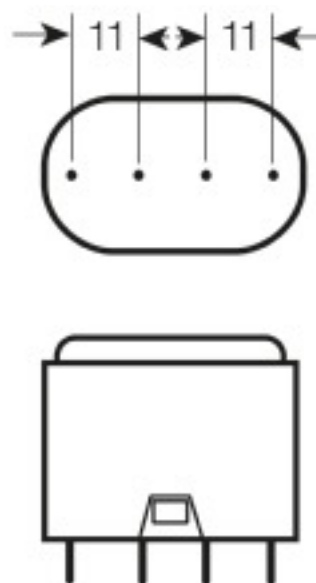

Base

Colors & materials

Lamp mercury content	2.6 mg
----------------------	--------

Temperatures

Rated ambient temp.w.max.luminous flux	25.0 °C
--	---------

Lifespan

Service life	13000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50

Lifespan

Operation mode LLMF/LSF	HF
Lifespan	20000 h ¹⁾

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	2G11
Appropriate disposal acc. to WEEE	Yes

Capabilities

Suitable for indoor	Yes
----------------------------	-----

Certificates & standards

EEI – Energy Label	B
---------------------------	---

Equipment / Accessories

- Suitable for standard control gears and starters
- Suitable for operation on electronic and conventional control gear

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300665481	Folding carton box 1	46 mm x 26 mm x 598 mm	190.00 g	0.72 dm ³
4050300665498	Shipping carton box 10	443 mm x 138 mm x 275 mm	2060.00 g	16.81 dm ³

References / Links

For more information on QUICKTRONIC electronic control gear go to

- ▶ www.osram.com/QUICKTRONIC

For more information on the system guarantee and the terms and conditions of the guarantee visit

- ▶ www.osram.com/system-guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.