

HQI-TS 150 W/D RX7S-24

POWERSTAR HQI-TS EXCELLENCE | Metal halide lamps with quartz technology for enclosed luminaires



- Shop interiors, shop windows
- Shopping arcades
- Foyers, reception areas
- Buildings, monuments, bridges
- Museums, exhibitions
- Exhibition halls and trade fairs
- Pedestrian zones, public squares
- Parks and gardens

Product benefits

- High efficiency
- Uniform distribution of light
- Good to excellent color rendering
- Long life time
- Hot restrike capable

Product features

- POWERSTAR quartz technology
- UV filter technology
- Light colors: warm white (WDL), neutral white (NDL), daylight (D), cool daylight (CD)
- Average life: 12,000 hours



Technical data

Electrical data

Nominal wattage	150 W
PFC capacitor at 50 Hz	20 μ F ¹⁾
Lamp current	1.8 A
Rated wattage	150 W
Rated lamp efficacy (standard condition)	80 lm/W


¹⁾ At rated voltage and $\cos \varphi \geq 0.9$

Light technical data

Luminous flux	13500 lm
Color rendering index Ra	80
Color rendering group	1B
Color temperature	5600 K
Luminous efficacy	81 lm/W

Dimensions & weight

Diameter	23.0 mm
Length	135.0 mm
Light center length (LCL)	66.0 mm

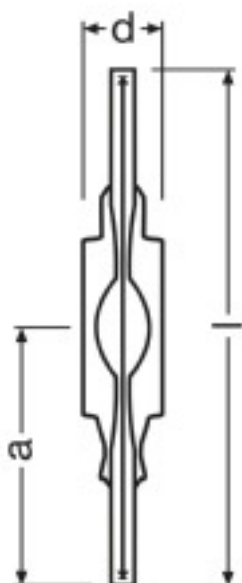

Product line drawing with letters

Colors & materials

Mercury-free	No
Lamp mercury content	12.1 mg

Temperatures


Maximum permitted pinch temperature	350 °C
-------------------------------------	--------

Lifespan

Lifespan B50	12000 h
--------------	---------

Additional product data

Base (standard designation)	RX7s
Design / version	Clear

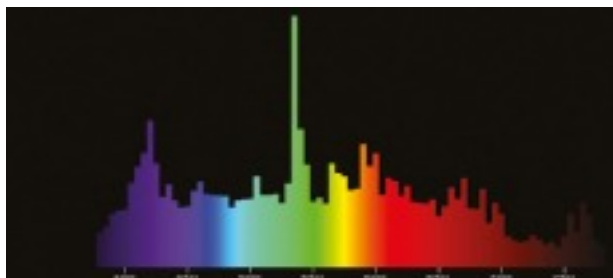

Spectral power distribution

Capabilities


Dimmable	No
Burning position	p45

Country specific categorizations

ILCOS	MD/UB-150/56/1B-H-RX7s=24-23/132/H
--------------	------------------------------------


System guarantee

For the vast majority of our lamps we are offering an extended system guarantee in conjunction with OSRAM POWERTRONIC control gear.

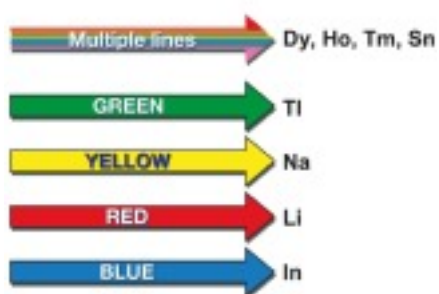


Variation possibilities of the Colour Temperature

		T_n	CRI
Daylight	D	> 5300 K	≥90
Neutral White	N	ca. 4000 K	60-69
Neutral White de luxe	NDL	4200 K	≥80
Warm White de luxe	WDL	3000 K	≥80

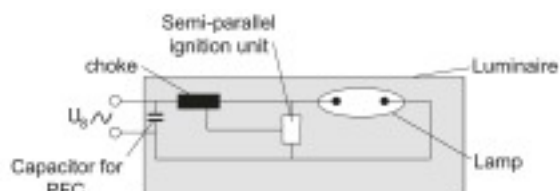


Others graphics

Circuit diagram

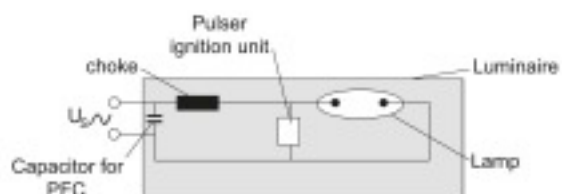

Circuit diagram

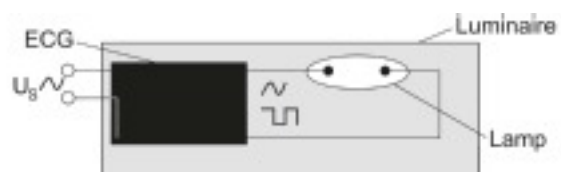

Circuit diagram

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321678409	Folding carton box 1	35 mm x 31 mm x 141 mm	32.00 g	0.15 dm ³
4008321678416	Shipping carton box 12	116 mm x 156 mm x 154 mm	498.00 g	2.79 dm ³

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

- ▶ www.osram.com/system-guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.