



## Olymp PHYTO

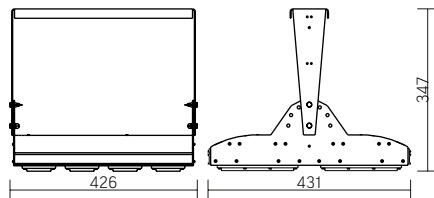


Угол поворота – 180°  
Размер светильника:  
426×431×347mm  
Размер упаковки  
светильника:  
476×481×252mm  
PF ≥ 0,97

Артикул	Мощность	PPF, мкмоль/с	Угол рассеивания
V1-I2-70096-04L10-65180RB	180W	388	12°
V1-I2-70096-04L09-65180RB	180W	388	19°
V1-I2-70096-04L07-65180RB	180W	388	60°
V1-I2-70096-04L06-65180RB	180W	388	90°
V1-I2-70096-04L08-65180RB	180W	388	30°×110°
V1-I2-70096-04L05-65180RB	180W	388	120°




12° и 19°

60° и 90°




30°×110°




○ металл

## Olymp PHYTO Premium

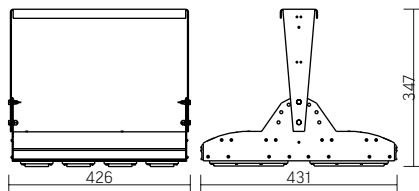


Угол поворота – 180°  
Размер светильника:  
310×211×262mm  
Размер упаковки  
светильника:  
400×310×150mm  
PF ≥ 0,97

Артикул	Мощность	PPF, мкмоль/с	Угол рассеивания
V1-I2-70096-04L10-6520040	200W	411	12°
V1-I2-70096-04L09-6520040	200W	411	19°
V1-I2-70096-04L07-6520040	200W	411	60°
V1-I2-70096-04L06-6520040	200W	411	90°
V1-I2-70096-04L08-6520040	200W	411	30°×110°
V1-I2-70096-04L05-6520040	200W	411	120°



12° и 19°

60° и 90°




30°×110°




○ металл

## Olymp PHYTO

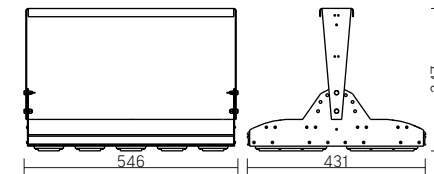


Угол поворота – 180°  
Размер светильника:  
546×431×347mm  
Размер упаковки  
светильника:  
620×567×252mm  
PF ≥ 0,97

Артикул	Мощность	PPF, мкмоль/с	Угол рассеивания
V1-I2-70097-04L10-65220RB	220W	485	12°
V1-I2-70097-04L09-65220RB	220W	485	19°
V1-I2-70097-04L07-65220RB	220W	485	60°
V1-I2-70097-04L06-65220RB	220W	485	90°
V1-I2-70097-04L08-65220RB	220W	485	30°×110°
V1-I2-70097-04L05-65220RB	220W	485	120°




12° и 19°

60° и 90°




30°×110°




○ металл

## Olymp PHYTO Premium

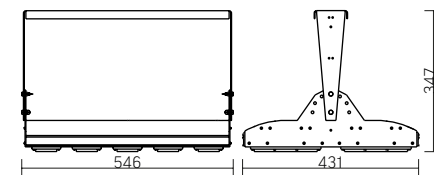


Угол поворота – 180°  
Размер светильника:  
546×431×347mm  
Размер упаковки  
светильника:  
620×567×252mm  
PF ≥ 0,97

Артикул	Мощность	PPF, мкмоль/с	Угол рассеивания
V1-I2-70097-04L10-6525040	250W	514	12°
V1-I2-70097-04L09-6525040	250W	514	19°
V1-I2-70097-04L07-6525040	250W	514	60°
V1-I2-70097-04L06-6525040	250W	514	90°
V1-I2-70097-04L08-6525040	250W	514	30°×110°
V1-I2-70097-04L05-6525040	250W	514	120°



12° и 19°

60° и 90°



30°×110°



○ металл

