

## HO 39 W/830

---

LUMILUX T5 HO | Tubular fluorescent lamps 16 mm, high output



- Industry
- Public buildings
- Offices
- Tunnels, underpasses
- Car parks

### Product benefits

---

- Excellent luminous flux
- Up to 20 % more economical than LUMILUX T8
- Up to 50 % smaller volume than comparable T8 lamps
- Natural colors

### Product features

---

- Very good lumen maintenance: >90 % throughout the life of the lamp
- Long average life time: up to 24,000 h (with QUICKTRONIC ECG)
- Good color rendering group: 1B ( $R_a$ : 80...89)
- Dimmable



## Technical data

---

### Electrical data


Nominal wattage	39 W
Rated lamp efficacy (HF data)	Under clarification by authority and standardization body
Rated lamp efficacy (standard condition)	82 lm/W
Rated wattage	38 W

### Light technical data

Color rendering index Ra	>=80
Rated luminous flux	3100 lm
Luminous flux at 25 °C	3100 lm
Light color	830
Color temperature	3000 K
Nominal luminous flux	3100 lm
Rated LLMF at 2,000 h	0.95
Rated LLMF at 4,000 h	0.92
Rated LLMF at 6,000 h	0.91
Rated LLMF at 8,000 h	0.90
Rated LLMF at 12,000 h	0.90
Rated LLMF at 16,000 h	0.90
Rated LLMF at 20,000 h	0.89


### Dimensions & weight

Tube diameter	16 mm
Length	849.0 mm
Length with base excl. base pins/connection	849.00 mm
Diameter	16.0 mm

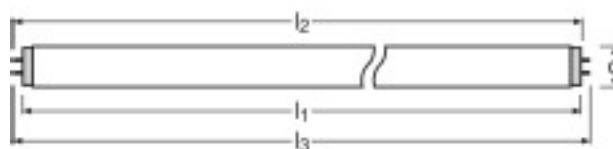

*Product line drawing with letters*

*Product line drawing - technical*

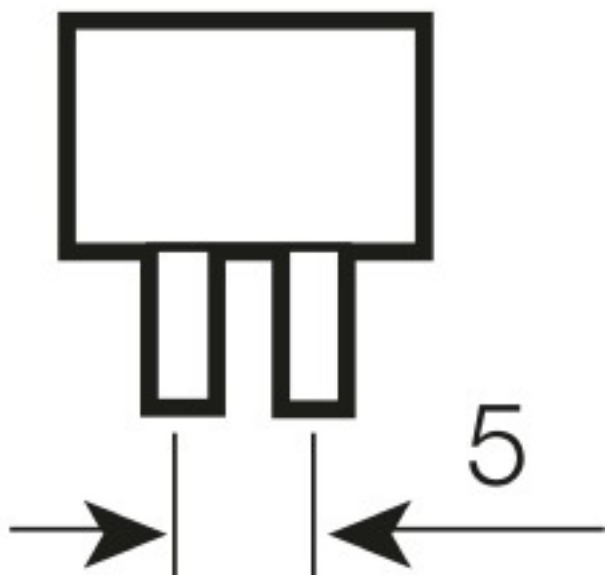

*Base*

## Colors &amp; materials

Lamp mercury content	1.5 mg
----------------------	--------

## Temperatures

Rated ambient temp.w.max.luminous flux	35.0 °C
--	---------


## Lifespan

Service life	19000 h <sup>1)</sup>
Lifespan	24000 h <sup>1)</sup>
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.99
Rated lamp survival factor at 16,000 h	0.97
Rated lamp survival factor at 20,000 h	0.85
Operation mode LLMF/LSF	HF

<sup>1)</sup> With preheat ECG

## Additional product data

Base (standard designation)	G5
Appropriate disposal acc. to WEEE	Yes
Footnote used only for product	Suitable for ECG operation only/Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C

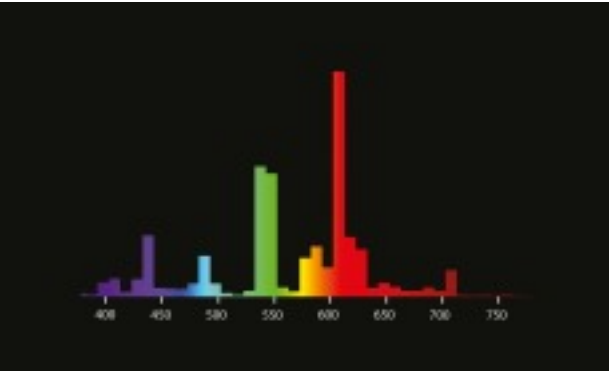

Spectral power distribution

Capabilities

Suitable for indoor	Yes
---------------------	-----

Certificates & standards

EEI – Energy Label	A
--------------------	---

## System guarantee


---

OSRAM System+ Guarantee in combination with OSRAM ECGs

## Safety advice


---

In case of lamp breakage: [www.osram.com/brokenlamp](http://www.osram.com/brokenlamp)

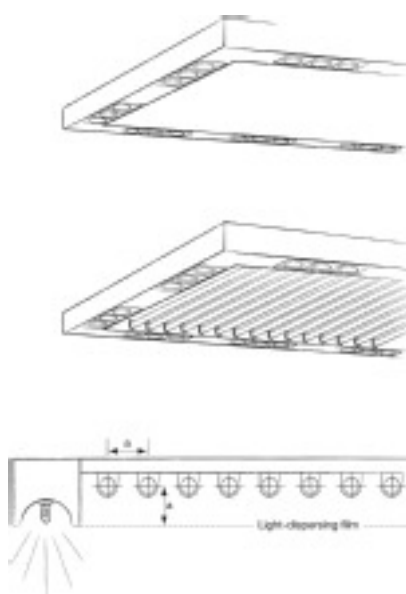


---

*Others graphics*

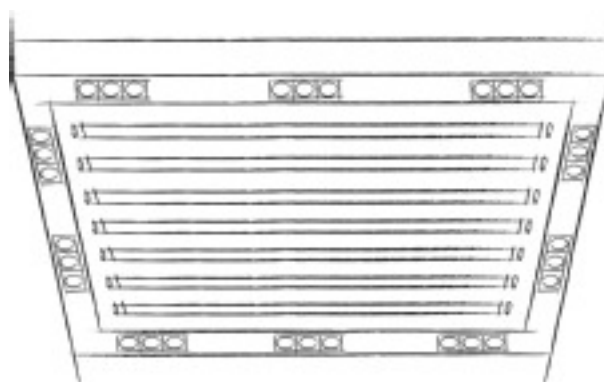

---

*Others graphics*

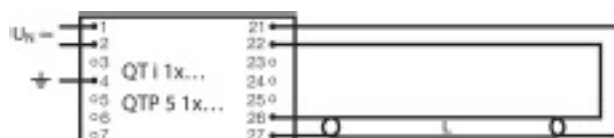

Circuit diagram



Circuit diagram

## Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300453552	Unpacked 1	16 mm x 15 mm x 860 mm	86.25 g	0.21 dm <sup>3</sup>
4050300453569	Shipping carton box 40	194 mm x 83 mm x 900 mm	3414.00 g	14.49 dm <sup>3</sup>
4050300591728	Sleeves 1	23 mm x 18 mm x 870 mm	96.20 g	0.36 dm <sup>3</sup>
4050300591735	Shipping carton box 20	110 mm x 90 mm x 887 mm	2134.00 g	8.78 dm <sup>3</sup>

## References / Links

---

For more information on QUICKTRONIC electronic control gear go to

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.