

HCI-T 70 W/830 WDL G12

POWERBALL HCI-T | Metal halide lamps with ceramic technology for enclosed luminaires



- Shop interiors, shop windows
- Shopping arcades
- Foyers, reception areas
- Museums, exhibitions
- Exhibition halls and trade fairs
- Factories and workshops

Product benefits

- Very high efficiency
- Good to excellent color rendering
- Very good color stability
- UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter

Product features

- POWERBALL ceramic technology
- UV filter technology
- Light colors: warm white (830 WDL), neutral white (942 ND)
- Average life: 15,000 hours (on electronic control gear)
- Average life: 12,000 hours (on magnetic control gear)



Technical data

Electrical data

Nominal wattage	70 W
Lamp current	1 A
PFC capacitor at 50 Hz	12 μ F ¹⁾
Rated wattage	74 W

¹⁾ At rated voltage and $\cos \varphi \geq 0.9$

Light technical data


Luminous flux	7400 lm ¹⁾
Color rendering index Ra	88
Color rendering group	1B
Color temperature	3000 K
Luminous efficacy	101 lm/W ²⁾
Light color	830

¹⁾ In operation on low frequency square wave electronic ballast, 70-400 Hz. Operation on electromagnetic ballast may be less efficient.


²⁾ In operation on low frequency square wave electronic ballast, 70-400 Hz. Operation on electromagnetic ballast may be less efficient.

Dimensions & weight

Diameter	19.0 mm
Length	100.0 mm
Light center length (LCL)	56.0 mm

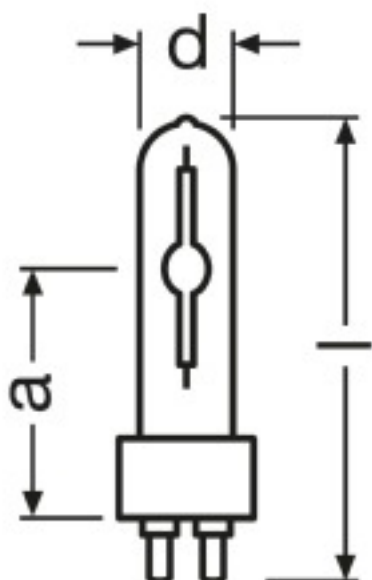

Product line drawing with letters

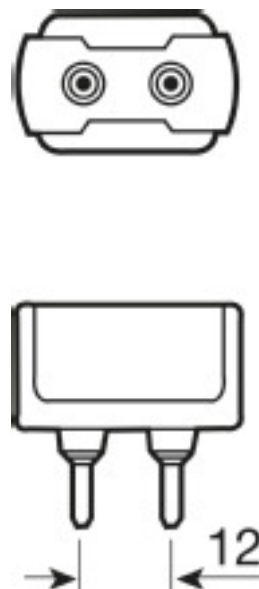

Base

Colors & materials

Mercury-free	No
Lamp mercury content	5.5 mg

Temperatures

Maximum permitted pinch temperature	350 °C
-------------------------------------	--------

Lifespan

Lifespan B50	15000 / 12000 h ¹⁾
--------------	-------------------------------

¹⁾ At ECG / At CCG

Additional product data


Base (standard designation)	G12
Design / version	Clear

Capabilities

Burning position	Any
------------------	-----


System guarantee

For the vast majority of our lamps we are offering an extended system guarantee in conjunction with OSRAM POWERTRONIC control gear.

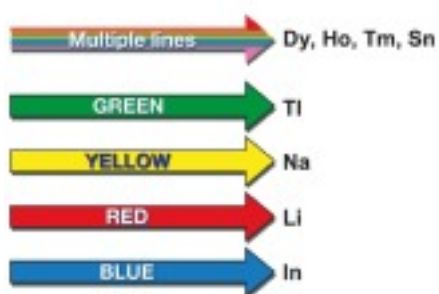



Variation possibilities of the Colour Temperature

		T_n	CRI
Daylight	D	> 5300 K	≥90
Neutral White	N	ca. 4000 K	60-69
Neutral White de luxe	NDL	4200 K	≥80
Warm White de luxe	WDL	3000 K	≥80

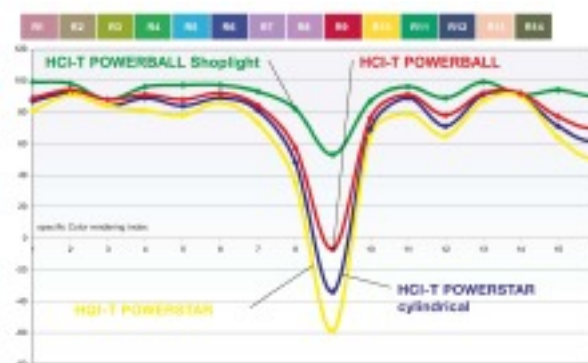


Others graphics

Others graphics

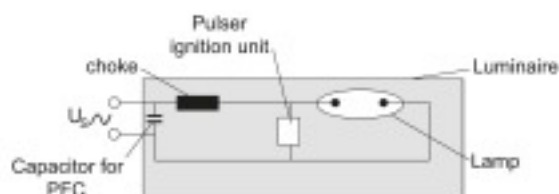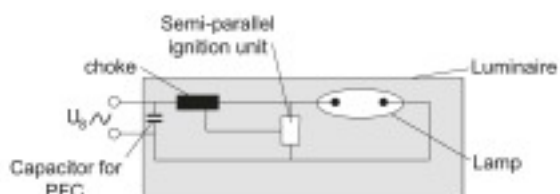

Circuit diagram

Circuit diagram

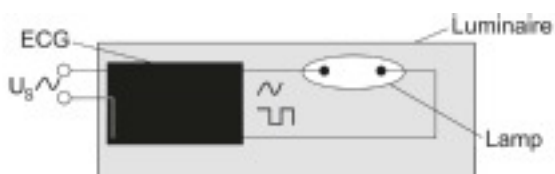

Circuit diagram

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321678430	Folding carton box 1	42 mm x 42 mm x 142 mm	42.00 g	0.25 dm ³
4008321678447	Shipping carton box 12	139 mm x 161 mm x 180 mm	586.00 g	4.03 dm ³

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ www.osram.com/system-guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.