

QTP5 3X14,4X14/220...240

QUICKTRONIC PROFESSIONAL 5 | ECG for FL 16 mm



- Suitable for use in emergency lighting systems as per EN 50172/DIN VDE 0108-100

Product benefits

- Perfect lamp start for applications with motion sensors
- Automatic restart after lamp replacement

Product features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz, 50 Hz...60 Hz
- Lamp start with optimum filament preheating
- Life time: >100,000 h (for T = 65°C at T_c)
- Automatic shutdown of defective lamps and at end of life (EoL)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929
- RI suppression: to EN 55015:2006+A1:2007+A2:2009/CISPR 15
- Line harmonics: to EN 61000-3-2
- Immunity: to EN 61547

Technical data

Electrical data

Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Operating frequency	40...50 kHz


Light technical data

Starting time	1.2 s ¹⁾
---------------	---------------------

¹⁾ Optimized preheat start

Dimensions & weight

Length	280.0 mm
Width	40.0 mm
Height	21.0 mm
Product weight	240.00 g

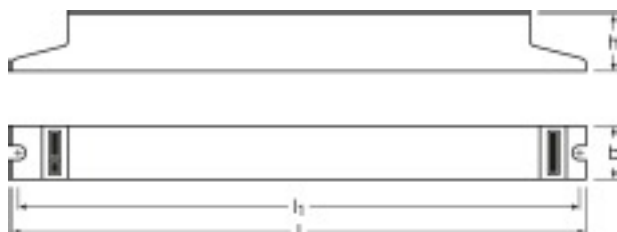

Product line drawing with letters

Temperatures


Ambient temperature range	-20...+50 °C
---------------------------	--------------

Capabilities

Dimmable	No
Suitable for fixtures with prot. class	I / II
End of Life safety shutdown	EOL T.2

Certificates & standards

Approval marks – approval	VDE / VDE-EMC / ENEC 10 / CE
EEI – Energy Label	A2 BAT
Standards	acc. to EN 61347-2-3 / acc. to EN 55015:2006 + A1:2007 / acc. to EN 61000-3-2 / acc. to EN 61547

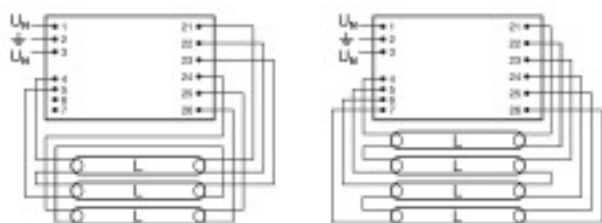

Wiring diagram

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.